




labelmate

THE WORLD'S LEADING MANUFACTURER OF LABEL DISPENSERS,
REWINDERS, UNWINDERS, SLITTERS & COUNTING SOLUTIONS

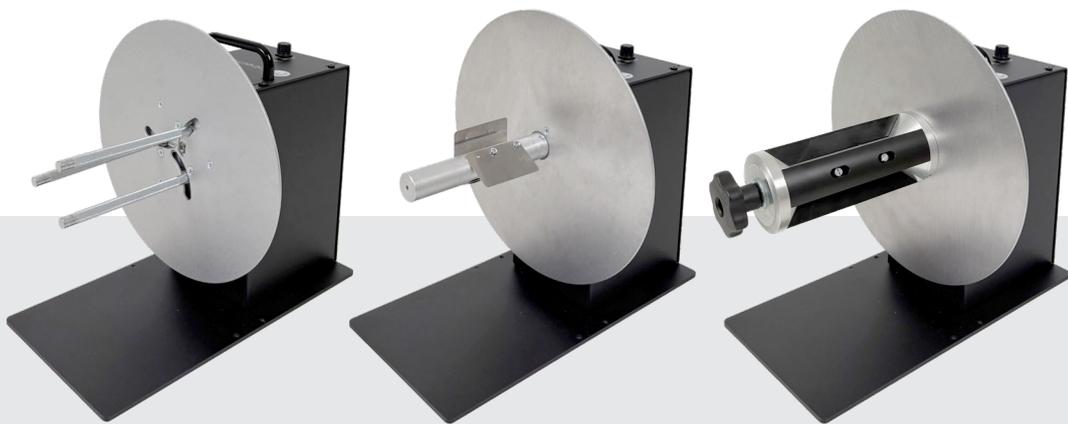

UNPOWERED UNWINDER
UCAT-1


labelmate.com

Unpowered Label Unwinders


HEAVY-DUTY UNWINDERS UCAT-1

Label unwinders provide a convenient way to **manage your supply roll of labels** as it feeds into a printer. You can use larger rolls of labels to minimize your unit label cost. The supply roll of labels does not have to be refreshed as often, **saving time and adding convenience**. External label rolls are always visible, making it easy to monitor the status of your label supply.

- ✓ Small footprint to fit on any desk
- ✓ Easy setup: attach the labels to the take-up core and ready to start
- ✓ Speed up to 125cm/sec to work with the fastest barcode printers available on the market
- ✓ Features adjustable speed/braking to align with printer
- ✓ Large capacity for roll diameters up to 300mm

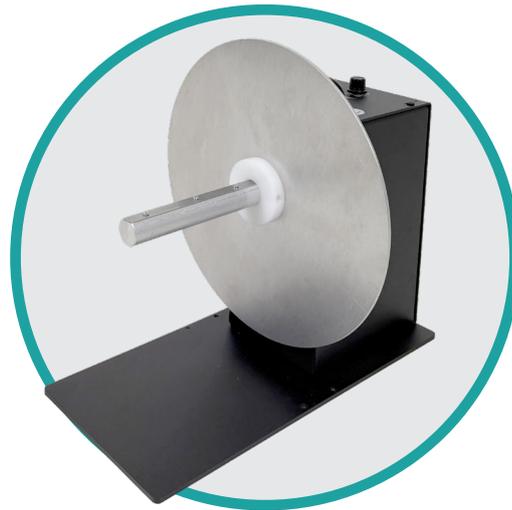

UCAT-1-1-INCH

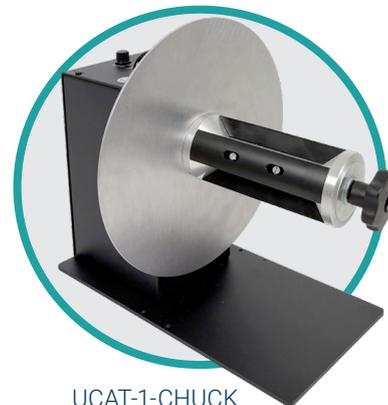

UCAT-1-CHUCK

FEATURES

- The UCAT-1-Standard has a vane-style core Holder
- The UCAT-1-ACH employs an adjustable core holder enabling the use of varying core sizes, for maximum flexibility
- The CAT-1-CHUCK includes a quick-locking "Quick-Chuck" core chuck permitting the fastest loading and unloading of cores and label rolls
- CHUCK/STANDARD/10-INCHES models come standard for using cores in 76mm. On request available in 38/40/44/50/70 mm.
- Weight: 9.6 KG to 11.1 KG depending configuration
- Max. Label Roll Weight: STD: 8kg - ACH: 7kg - QC: 8KG - 10-IN: 10kg
- Max. Label Roll Diam: 300mm, 280mm for ACH, 220mm for 1-INCH

UNPOWERED UNWINDERS UCAT-1

| P/N | MODEL | DESCRIPTION | MAX LABEL WIDTH (mm) | MAX ROLL DIAM (mm) | MAX WEIGHT |
|--------|------------------|--|--------------------------|--------------------|------------|
| LMU002 | UCAT-1-STANDARD | Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Standard for 76mm cores (38/40/44/50/70/100mm available) | 155 | 300 | 8 KG |
| LMU003 | UCAT-1-ACH | Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Adjustable Core Holder for using any core diameter between 25 & 101 mm | 155 | 280 | 7 KG |
| LMU004 | UCAT-1-CHUCK | Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Easy-Loading Quick-Chuck for 76mm cores (38/40/44/70/100mm available) | 170 (optional 220 & 270) | 300 | 10 KG |
| LMU005 | UCAT-1-10-INCHES | Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Standard for 76mm cores (38/40/44/50/70/100mm available) | 255 | 300 | 10 KG |
| LMU006 | UCAT-1-1-INCH | Self-Powered-Adjustable Speed, Proportional Frictionless Braking. For 25,4 mm (1") cores | 155 | 220 | 8 KG |

OPTIONS


| P/N | MODEL | DESCRIPTION |
|--------|----------------|--|
| LMX457 | R-16 | Option available on UCAT-1-STANDARD and UCAT-1-CHUCK to accept rolls up to 400mm in diameter. Factory installed. |
| LMX579 | | UNIVERSAL- ALIGNMENT PLATE for any desktop Thermal Transfer and Inkjet color printer |
| LMX491 | STANDARD SHAFT | Standard shaft for UCAT-1 with vanes, internal and external flanges. |
| LMX546 | 1' SHAFT | 1-Inch shaft for UCAT-1 with vanes, internal and external flanges. |
| LMX492 | 10" -SHAFT | 10-Inches shaft for UCAT-1 with vanes, internal and external flanges. |
| LMX500 | ACH-SHAFT | Adjustable Core Holder for any core size from 25 to 101mm in diameter. With inner flange. |

GENERAL

- Limited Warranty of 2 Years, 1 Year on the Power Supply



Your local partner:

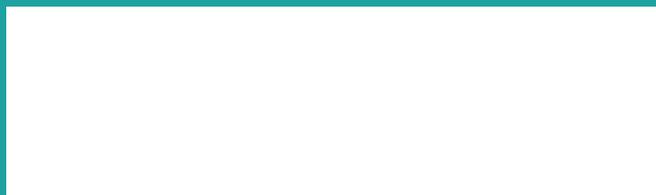

+32 2 375 69 60

brussels@labelmate.com

Bergensesteenweg 78
1651 Lot (Belgium)

www.labelmate.com